

700W LED PROFILE

www.lbtpro.com / info@lbtpro.com

- 700W White LED
- CMY Infinite Color Mixing
- CTO Linear
- 7° - 42° Zoom Angle



Technical Parameter

Optics

Source: 700W white LED
 CT: 6200K/8000K
 Life: > 20,000H
 CRI: ≥ 74/≥ 90

Power Supply

AC100-240V 50/60Hz
 Switch power supply
 Input power: 890w
 PF ≥ 0.98

Movement

Pan movement: 540° (16 bit)
 Tilt movement: 270° (16 bit)
 Advanced motion system:
 auto repositioning, fast,
 quiet and smooth

Colors

CMY infinite color mixing
 CTO linear
 7 dichroic filters + open, bidirectional
 color rainbow can be created, even
 and smooth CMY+CTO

Other Spec

Input signal isolation
 Optional installed wireless receiver
 Optional ArtNET control
 RDM compatible
 intelligent fan noise control,
 intelligent energy-saving

Software

Remote reset DMX address, fixture
 reset, sound control by DMX
 Run time of LED engine and fixture

Gobos

1 Rotating gobo wheels:
 6 interchangeable + open ,with
 shaking effect and gobo wheel can
 be positioned
 1 fixed gobo wheel:
 7 interchangeable+open,with gobo
 shaking effect

Features


DMX channels: 34/54
 prism: 1 bidirectional 5-facet
 rotating prism , prism can be
 positioned
 Focus: 5-100% electronic Iris
 Shutter: electronic, variable from
 1-25Hz or random
 Dimming: 0-100% linear dimming
 Frost: light frost, heavy frost
 Zoom: 7°- 42°linear zoom
 Patented framing system:
 1 set of all directional framing
 system with 8 framing blade precise
 position can be cutting 90
 rotation, full field travel with the ability
 to create different shapes.
 Animation wheel: special dynamic
 flame or water effect

Display

Battery operated for fast addressing
 15 second standby auto lock
 Pan/ Tilt disengage (hold
 MENU and ENTER button)

Dimensions & Weight

Packing Dimension :
 855 x 400 x 510 mm
 Net Weight: 33 KG
 Gross Weight: 36KG

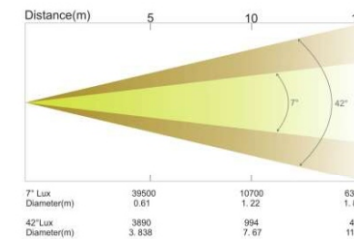

Static Gobo Wheel



Rotating Gobo Wheel



Animation wheel

