

GLOWSPOT HONOR 300 ZOOM

www.lbtpro.com / info@lbtpro.com

- 300W COB white LED
- 18-38° All-in-One Zoom
- Flicker Free
- Silent operation for Studio and Theaters



ArtNet ver. opt.



Powered by 300W 3200K or 5600K LED, the Honor 300 Zoom is designed to replace the 1K Tungsten Halogen profile light. The 18-38° "all-in-one" zoom range covers the most regular 19°, 26°, 36° lens. It creates a flat and even field of light and crisp pattern projection.

3200K/5600K	RDM Control	COB 300W LED	ZOOM	Flicker Free	98 TLCI	97 CRI	ART NET Optional
-------------	-----------------------	------------------------	------	--------------	-------------------	------------------	---------------------

Key features:

- 300W COB white LED
- CRI 97, R9≥90, TLCI up to 98
- HD optical system, clean shutter cuts beam
- 18-38° "all-in-one" zoom range
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Artnet version optional
- Engine and lens compatible with industry standard



Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting


Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Size:	745 x 294 x 294mm
Light source:	300W COB LED	Package(carton):	790 x 350 x 360mm
Color temperature:	3200K or 5600K	N.W.:	8.7 kg
Zoom range:	18°-38°, 5°-10°, 9°-18° optional	G.W.:	11.5 kg
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94	Accessories(incl.):	Power cable, gel frame, Safety rope
Power connection:	PowerCON in & out	Accessories(opt.):	Gobo holder, Clamp
Signal connection:	3-pin XLR in & out(5-pin opt.), Net in & out(opt.)	GOBOSize:	OD 58mm, image area 50mm
Control channels:	1/2/3	Compliance:	CE
Control mode:	Rotary, DMX, RDM and Art-Net(optional)	Environment:	IP20
Housing:	Color black, engineering plastic		

Photometric

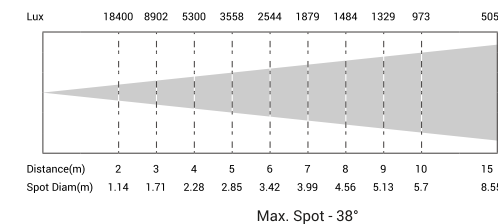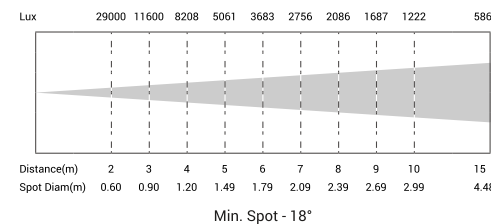

DIMENSIONS

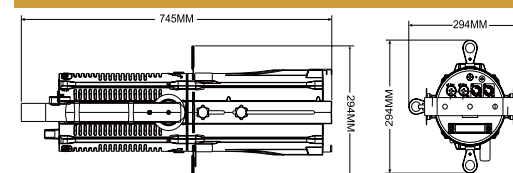

Accessories

