

TYPHOON HYBRID-XL



TYPHOON HYBRID-XL Integrating beam, patterns, wash and framing function, which adopts a 600-watt LED light source, and the illuminance at five meters is as high as 60610 lux, far exceeding similar products. With the 7°- 50° electronic zoom system And Professional CMY colour-mixing system, The fixture can provide a perfect and smooth colour-mixing transition. Combined with the colour wheel and the variable CTO of 3000-7000K, it endows comprehensive and delicate colours. Four independent framing blades, One rotatable gobo wheel, One fixed gobo wheel, Two frosted lenses, Two prisms and A unique dynamic animation wheel, to achieve endless dynamic effects. With brand-new lightweight aviation aluminium material, The Fixture is only 36kg. IP66 protection level, excellent waterproof and dustproof structure, ensuring the durability and stability of the product, and greatly reducing the maintenance cost. Suitable for theatres, cultural tourism And performance rentals business, etc.

SCALE



TECHNICAL PARAMETER	PAN/TILT ROTATION 540°/270°(8-16bit)	COLORS One color wheel (6 dichroic-filters +White,Rainbow-flow effect)	ANIMATION WHEEL 1 animation wheel
MAX. POWER 750W	CON PERSONALITY BASIC/35CHS、STANDARD/41CHS、Extend/44CHS	CMY CMY, CTO	FOCUS Motorized linear focus
LIGHT SOURCE 600W LED Module	ROTATING GOBO 7 Gobos+ White,Gobo-flow effect,Gobo shake, Bi-directional rotation	PRISM One piece of 4 F prism with bi-directional rotation, Speed adjustable	FROST 1 Frost filter
ANGLE 7°-50°	STATIC GOBO 10 + 1 Gobos	FRAMING SYSTEM 4 shutter blade; Each blade's angel and direction, can be individual controlled, fully blackout; The whole Framing module is ±60°	DIMENSIONS (L*W*H) 416x358x729mm
DISPLAY On board Control, 0-25Hz Strobe			

COLORS



CMY+CTO



ANIMATION WHEEL



STATIC GOBO




RATATING GOBO



ELECTRIC FRAMING SYSTEM



PHOTOMETRIC DATA

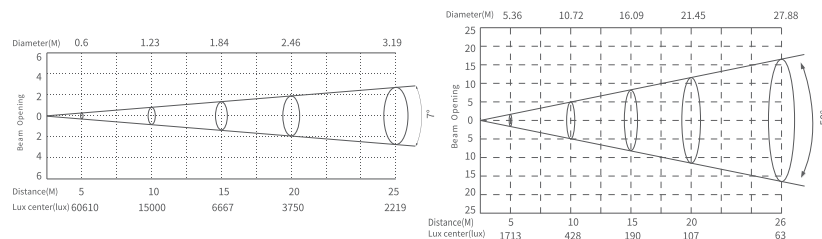

SPECIFICATIONS

