

LINEA 120

TECHNICAL PARAMETER

MULTIPLE COLOR

PRODUCT NAME	MAX. POWER	LUMEN	Lm / W	IM/KG (RGLB)	OPTICS
LINEA 120 (RGLB)	120W	7797lm	63.95	1559	LENS OPTICS : 15° AFTER DIFFUSER : 25° , 30° , 60° , 10°60° , 15°30° , 15°40° , 30°15° , 30°60° , 40°15° , 60°10° , 60°30°
3200K	120W	9256lm	76.52	-	
6500K	120W	9276lm	77.2	-	

CHANNEL MODE

Multiple Color and DMX channel mode: SOLID, ARC2, ARC2+D, ARC FULL, SPECIAL2.

COLOR CONSISTENCY SYSTEM COLOR TEMPERATURE SEGMENT


1800K	2200K	2700K	3000K	3200K	4000K	4500K
5000K	5600K	6000K	6500K	7000K	8000K	10000K

24 COLOR CARD

R40 Light Salmon	L24 Scarlet	L164 Flame Red	L765 LEE Yellow	R321 Soft Golden Amber	L652 Urban Sodium
L728 Steel Green	L117 Steel Blue	L354 Special Steel Blue	L794 Pretty'n Pink	L192 Flesh Pink	L328 Folies Pink
L237 CID(To Tungsten)	L08 Dark Salmon	L25 Sunset Red	R92 Turquoise	L513 Ice AndA Slice	L90 Dark Yellow Green
L501 New Colour Blue	L174 Dark Steel Blue	L142 Pale Violet	L127 Smokey Pink	L157 Pink	L332 Special Rose Pink

SPECIFICATIONS

AC100~240V 50/60Hz	Power Factor > 0.9	Dimmer 16Bit 0-100%	DMX512	RDM	-20°C~45°C	Die-cast aluminium	KG 4kg	CE	IP67
-----------------------	-----------------------	------------------------	--------	-----	------------	--------------------	-----------	----	------

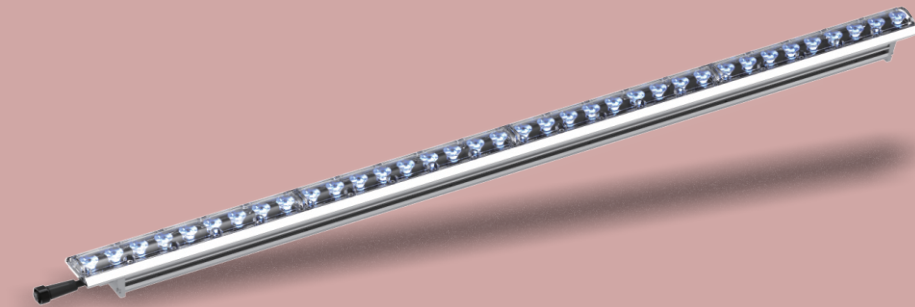


LINEA 120 is a linear flood light, designed to illuminate walls or any type of linear structure, integrated universal power supply and connect via the power and data box, thanks to the seamless connection and can have a good uniform color effect.


Applied to indoor and outdoor installation, such as shopping mall, hotel, church, bridge, etc.

DIMENSIONAL DRAWING


Dimensions (L*W*H) 1276x65.9x60.7mm

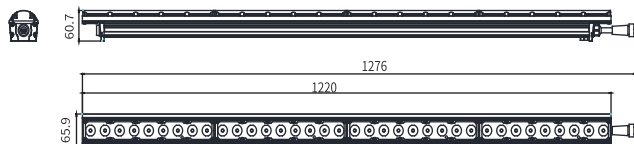

NECESSARILY ACCESSORIES



PHOTOMETRIC DATA

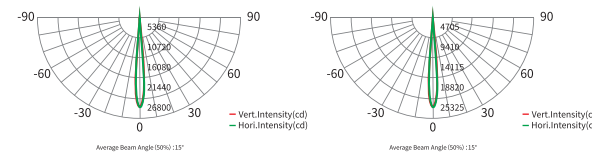

OPTIONAL ACCESSORIES

8-core extension line (0.5 meters) (1170000878)	20° Thin filter (2220000539)	30° Thin filter (2220000144)
8-core extension line (1.5 meters) (1170000877)	40° Thin filter (2220000145)	60° Thin filter (2220000198)
8-core extension line (3 meters) (1170000876)	1°30' Thin filter (2220000139)	1°40' Thin filter (2220000583)
8-core extension line (5 meters) (1170000875)	1°60' Thin filter (2220000266)	30°1' Thin filter (2220000217)
	30°60' Thin filter (2220000259)	60°30' Thin filter (2220000142)
	40°1' Thin filter (2220000229)	