

MEDIA FACADE (Pro Series)



MEDIA FACADE LED COIN ARCHITECTURAL LIGHTING

Pixel Pitch

150mm,200mm,250mm,300mm and other customized pitch

Long distance power supply

Save 40% power with more efficient power management design.With wide voltage range design,LED color always keep same brightness after long distance power supply.

LifeTime

Apply solid capacitor and other good brand components on PCB for long life time.We used Top Brand Silicone for better heatconduction, strong temperature withstand and perfect waterproof performance.

Control

Standard DMX512 control protocol(Max 44frames/second). The communication between fittings are synchronized perfectly under support of Colordreamer Artnet Controller.

Protection

Lighting and ESD Protection. Electrical Protections: short circuit, over current, over voltage and over temperature.

ORDERING INFORMATION

Product	Diffuser	Diameter	LED QTY	LED Color
D	C	50	06	03
LED Dot	C Clear M Milky	50mm	6LEDs	01 White 03 RGB 04 RGBW

COLORS



LED

LED Source SMD LED
LED QTY 6pcs
Beam Angle 120°

ELECTRICAL

Input voltage 24VDC
power consumption 1.5W per dot

CONTROL

Protocol ON/OFF DMX512
Pixels 150mm,200mm,250mm,300mm and other customized pitch
Addressing options Manual addressing

PHYSICAL


Housing Material PC(Polycarbonate)
Finish Black/White Mounting Options Surface mount
Lense Clear/Opal dome Luminaire Connection 5PIN cable with screw lock connector for DC and DMX

ENVIRONMENT


Operating Temperature -30° to 60° Humidity 0-95%,non-condensing
Startup Temperature -30° to 60° IP Outdoor IP67
Storage Temperature -40° to 80°

CERTIFICATE

DIMENSION

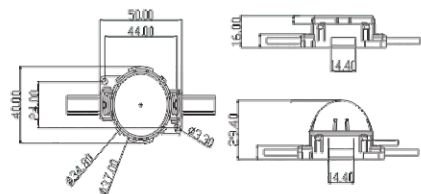

WIRING DIAGRAM

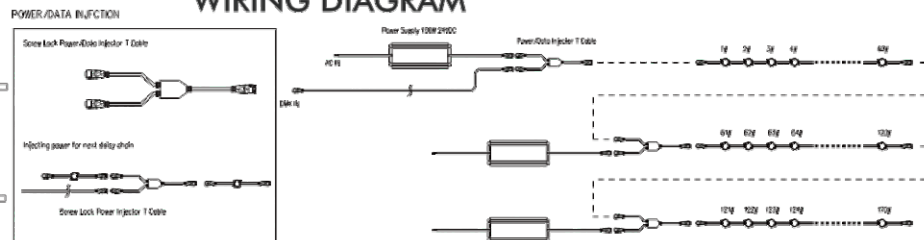

LUMINAIR INTERCONNECTION

