

ORBITER WASH S

www.lbtpro.com / info@lbtpro.com

- LED Qty : 7x40w RGBW
- Zoom : 8-50°
- IP65



NEW



Product Introduction

New ear of IP65 moving beam wash with high efficient RGBL resource, ultra-wide zoom range, excellent beam and wash effects. Light weight and compact design, super fast and accurate XY performance. It is suitable for both outdoor or indoor events, road shows, concerts, operas, banquets and various performance .

Product Parameters

Optical system		Appearance		Electrical Specs	
Light source	7*40W RGBL	Size	290X227X369mm	Voltage	100-240VAC, 50/60Hz
Beam angle	3.5-35°	Weight	9.8KG	Max. Power	320W
Field angle	5-50°	Casing	Flame-retardant plastic, die-casting aluminum	Power Connection	power in and out
LED Ring	RGB Ring	Color	Black	Signal socker	3pin or 5pin in and out


Control System

Pan/Tilt rotation	540°/220°(8-16bit)	Display	On board Control, Custom Mode, 0-25Hz Strobe
Dimmer	0-100%16Bit	Con Personality	HSIC\SSP\TOUR\TR16\CMY\PIXEL
Cooling	Forced Convection	Special	Pan/Tilt movement blackout, User-selectable pan/tilt ranges
Control	DMX512, RDM, W-DMX (optional)		

Work Environment

Ambient Temp	-20-45 °C
IP Rated	IP65

Dimensions

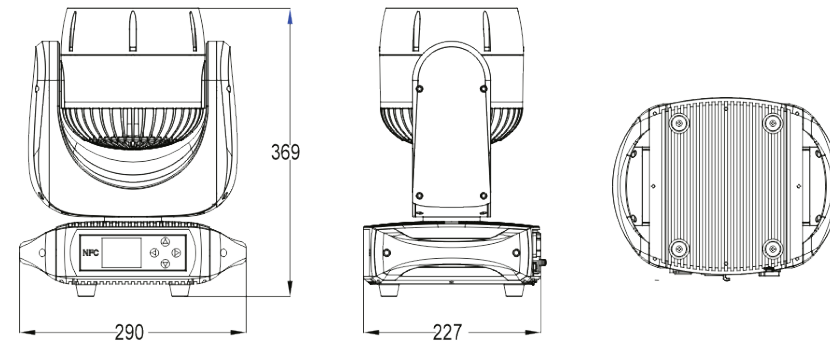

Illuminance at Distance

